




Carrydeck® Industrial Cranes

3300 Series
8.5 & 10.5 Ton Capacity

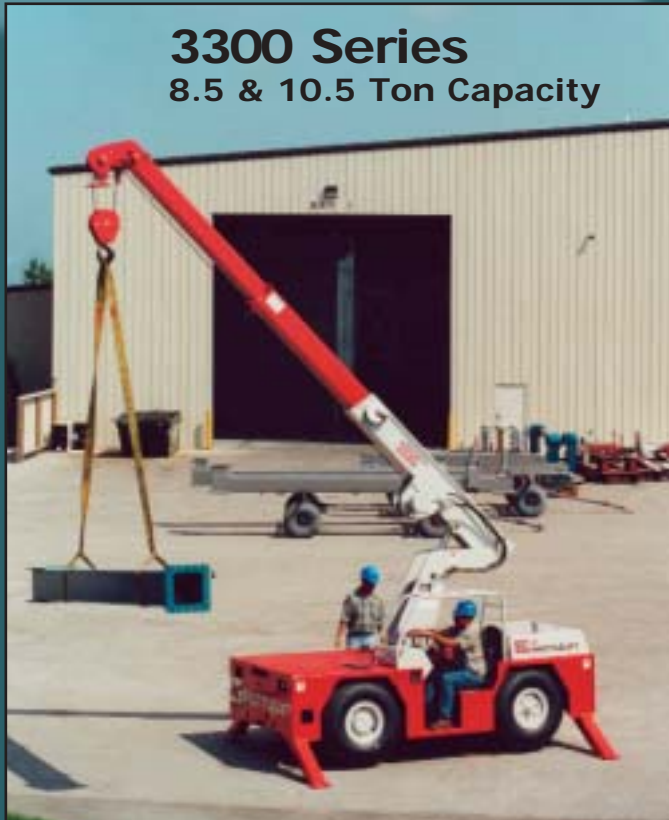

7700 Series
20 Ton Capacity



5500 Series
15 & 18 Ton Capacity



Carrydeck Cranes

	3330F	3330FL	3340B	5540	5560B	7750RT		
Max. Capacity: On Outriggers, 360°	17,000 lb (7711 kg) @ 5' (1.5 m) radius	17,000 lb (7711 kg) @ 5' (1.5 m) radius	21,000 lb (9525 kg) @ 3' (.914 m) radius	30,000 lb (13 608 kg) @ 6' (1.8 m) radius	36,000 lb (16 330 kg) @ 6' (1.8 m) radius	40,000 lb (18 144 kg) @ 10' (3.0 m) radius		
On Rubber Over the Front	10,000 lb (4540 kg) @ 5' (1.5 m) radius	10,000 lb (4540 kg) @ 5' (1.5 m) radius	11,500 lb (5216 kg) @ 5' (1.5 m) radius	16,000 lb (7258 kg) @ 6' (1.8 m) radius	16,000 lb (7258 kg) @ 6' (1.8 m) radius	30,000 lb (13 608 kg) @ 6' (1.8 m) radius		
Unit Weight	13,540 lb (6142 kg)	15,180 lb (6886 kg)	16,600 lb (7536 kg)	26,500 lb (12 020 kg)	30,700 lb (13 938 kg)	43,000 lb (19 522 kg)		
Deck Carrying Capacity	14,000 lb (6350 kg)	14,000 lb (6350 kg)	14,000 lb (6350 kg)	20,000 lb (9072 kg)	20,000 lb (9072 kg)	30,000 lb (13 608 kg)		
Max. Main Boom Length (horizontal boom pin to center of block)	3-Section 21' 2" (6.45 m) 4-Section 27' 8" (8.43 m)	3-Section 30' 2" (9.19 m) 4-Section 39' 8" (12.09 m)	3-Section 32' 10" (10.01 m)	3-Section 40' 0" (12.19 m)	4-Section 54' 6" (16.61 m)	5-Section 67' 0" (20.42 m) 3-Section 43' 0" (13.11 m)		
Jib/Boom Extension Length	6' (1.80 m)	6' (1.80 m)	12' (3.66 m) 18' (5.49 m)	15' (4.57 m)	15' (4.57 m)	17' (5.18 m)		
Max. Main Boom Hook Height	28' 0" (8.53 m)	38' 4" (11.68 m)	34' 6" (10.52 m)	43' 10" (13.36 m)	58' (17.68 m)	73' (22.25 m)		
Max. Hook Height with Jib	33' 3" (10.13 m)	43' 7" (13.28 m)	52' (15.85 m)	58' 10" (17.93 m)	73' (22.25 m)	90' (27.43 m)		
Standard Engine:	GM 3.0L EFI Gas Engine 70 HP	GM 3.0L EFI Gas Engine 70 HP	GM 3.0L EFI Dual Fuel Gas/LP 70 HP	GM 4.3L EFI Dual Fuel Gas/LP 100 HP	GM 4.3L EFI Dual Fuel Gas/LP 100 HP	Cummins Diesel 4BTA3.9 Turbo 130 HP		
Optional Engine:	Cummins 4B3.3L Turbo Diesel 85 HP	GM 3.0L EFI Dual Fuel Gas/LP 70 HP	Cummins 4B3.3L Turbo Diesel 85 HP	GM 3.0L EFI Dual Fuel Gas/LP 70 HP	Cummins 4B3.3L Diesel 85 HP	Cummins 4B3.9 Diesel 80 HP	Cummins 4BT3.9 Turbo Diesel 110 HP	N.A.
Steering Wheels	2 or 4	2 or 4	2 or 4	2 or 4	2 or 4	2 or 4		
Drive Axle	Front	Front	Front	Front-Standard & Rear-Optional	Front-Standard & Rear-Optional	Front & Rear		
Turning Radius (CL to outside of wheel) 4-Wheel Steer	10' 2" (3.10 m)	10' 2" (3.10 m)	9' 4.75" (2.86 m)	12' 4" (3.76 m)	12' 4" (3.76 m)	12' 11" (3.94 m)		
Wire Rope	1/2" Flex-X626	1/2" Flex-X626	9/16" EEIPS IWRC 6X19	1/2" EIPS IWRC 6X19	1/2" EIPS 10x19 Python Ultra	9/16" EEIPS IWRC 6X19		
Tire Size	10.00 x 15 14PR	10.00 x 15 14PR	10.00 x 15 14PR	385/65R22.5 Radial	385/65R22.5 Radial	14.00R24 Radial		
Dimensions:								
Overall Length – Transport Position	12' 7" (3.84 m)	15' 7" (4.75 m)	18' 0" (5.49 m)	21' 6" (6.55 m)	22' 8" (6.91 m)	24' 9" (7.54 m)		
Overall Height – Transport Position	7' 10" (2.39 m)	7' 10" (2.39 m)	7' 3" (2.21 m)	7' 11" (2.41 m)	7' 11" (2.41 m)	9' 10" (3.0 m)		
Overall Width – Transport Position	6' 7" (2.01 m)	6' 7" (2.01 m)	6' 7" (2.01 m)	7' 9.5" (2.37 m)	7' 9.5" (2.37 m)	8' 0" (2.44 m)		
Overall Width – Outriggers Extended	10' 2" (3.10 m)	10' 2" (3.10 m)	11' 9" (3.58 m)	13' 10" (4.22 m)	13' 10" (4.22 m)	16' 2" (4.93 m)		

Authorized Representative



SHUTTLELIFT, INC., 49 E. Yew St., P.O. Box 66,
Sturgeon Bay, WI 54235 USA

Ph: 920-743-8650 • FAX: 920-743-1522 • E-mail: sales@shuttlelift.com

www.shuttlelift.com